



Russian Headlight Assemblies

Part X: Headlight Cavity for Ural M-67 and M-67.36

***(Also See Part I: Headlight Cavity, Early Central
Switch and Speedometer)***

***Ernie Franke
eafranke@tampabay.rr.com
(09/2011)***

Ural (Урал) M-67



***Some M-67's Show the
Speedometer Contained in
Headlight Cavity***



The M-67 was the first Ural to have 12-Volts.

Ural (Урал) M-67



***Alternator
"Charge" Alarm***


Turn Signal

***Speedometer Separate from
Headlight Cavity***

Ural (Урал) M-67.36




***Speedometer Separate from
Headlight Cavity***

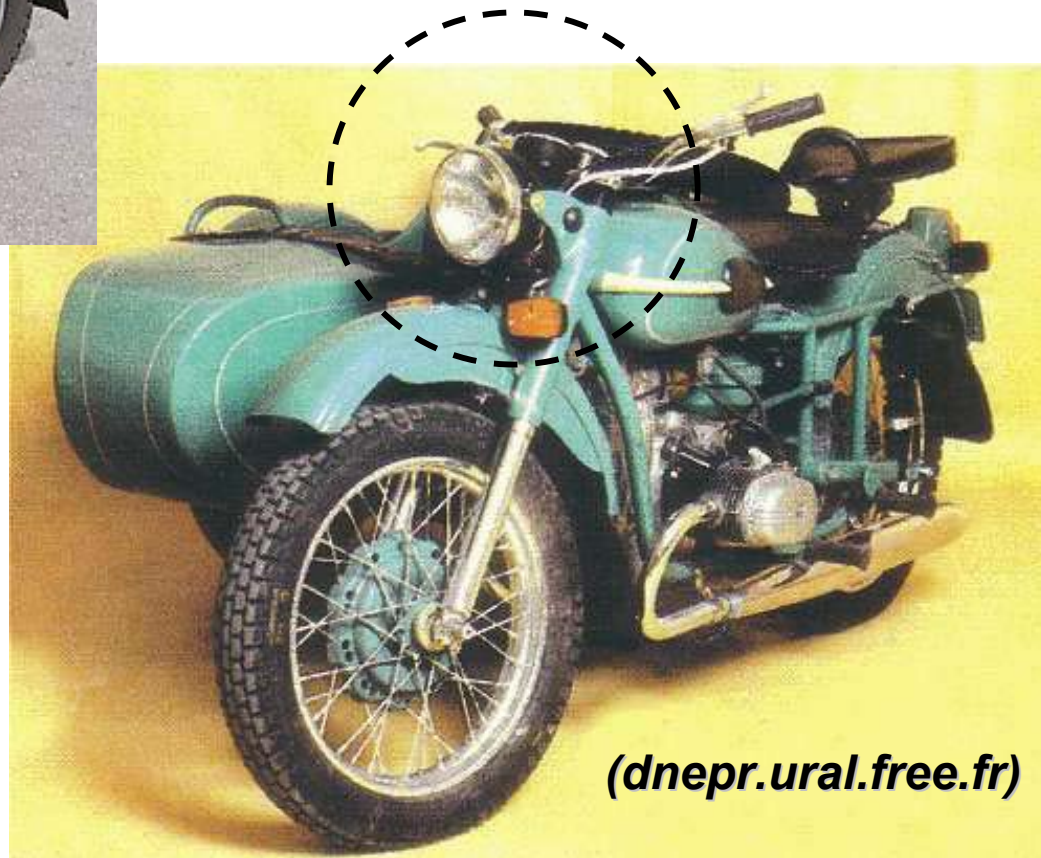

(dnepr.ural.free.fr)

Ural (Урал) M-67.36

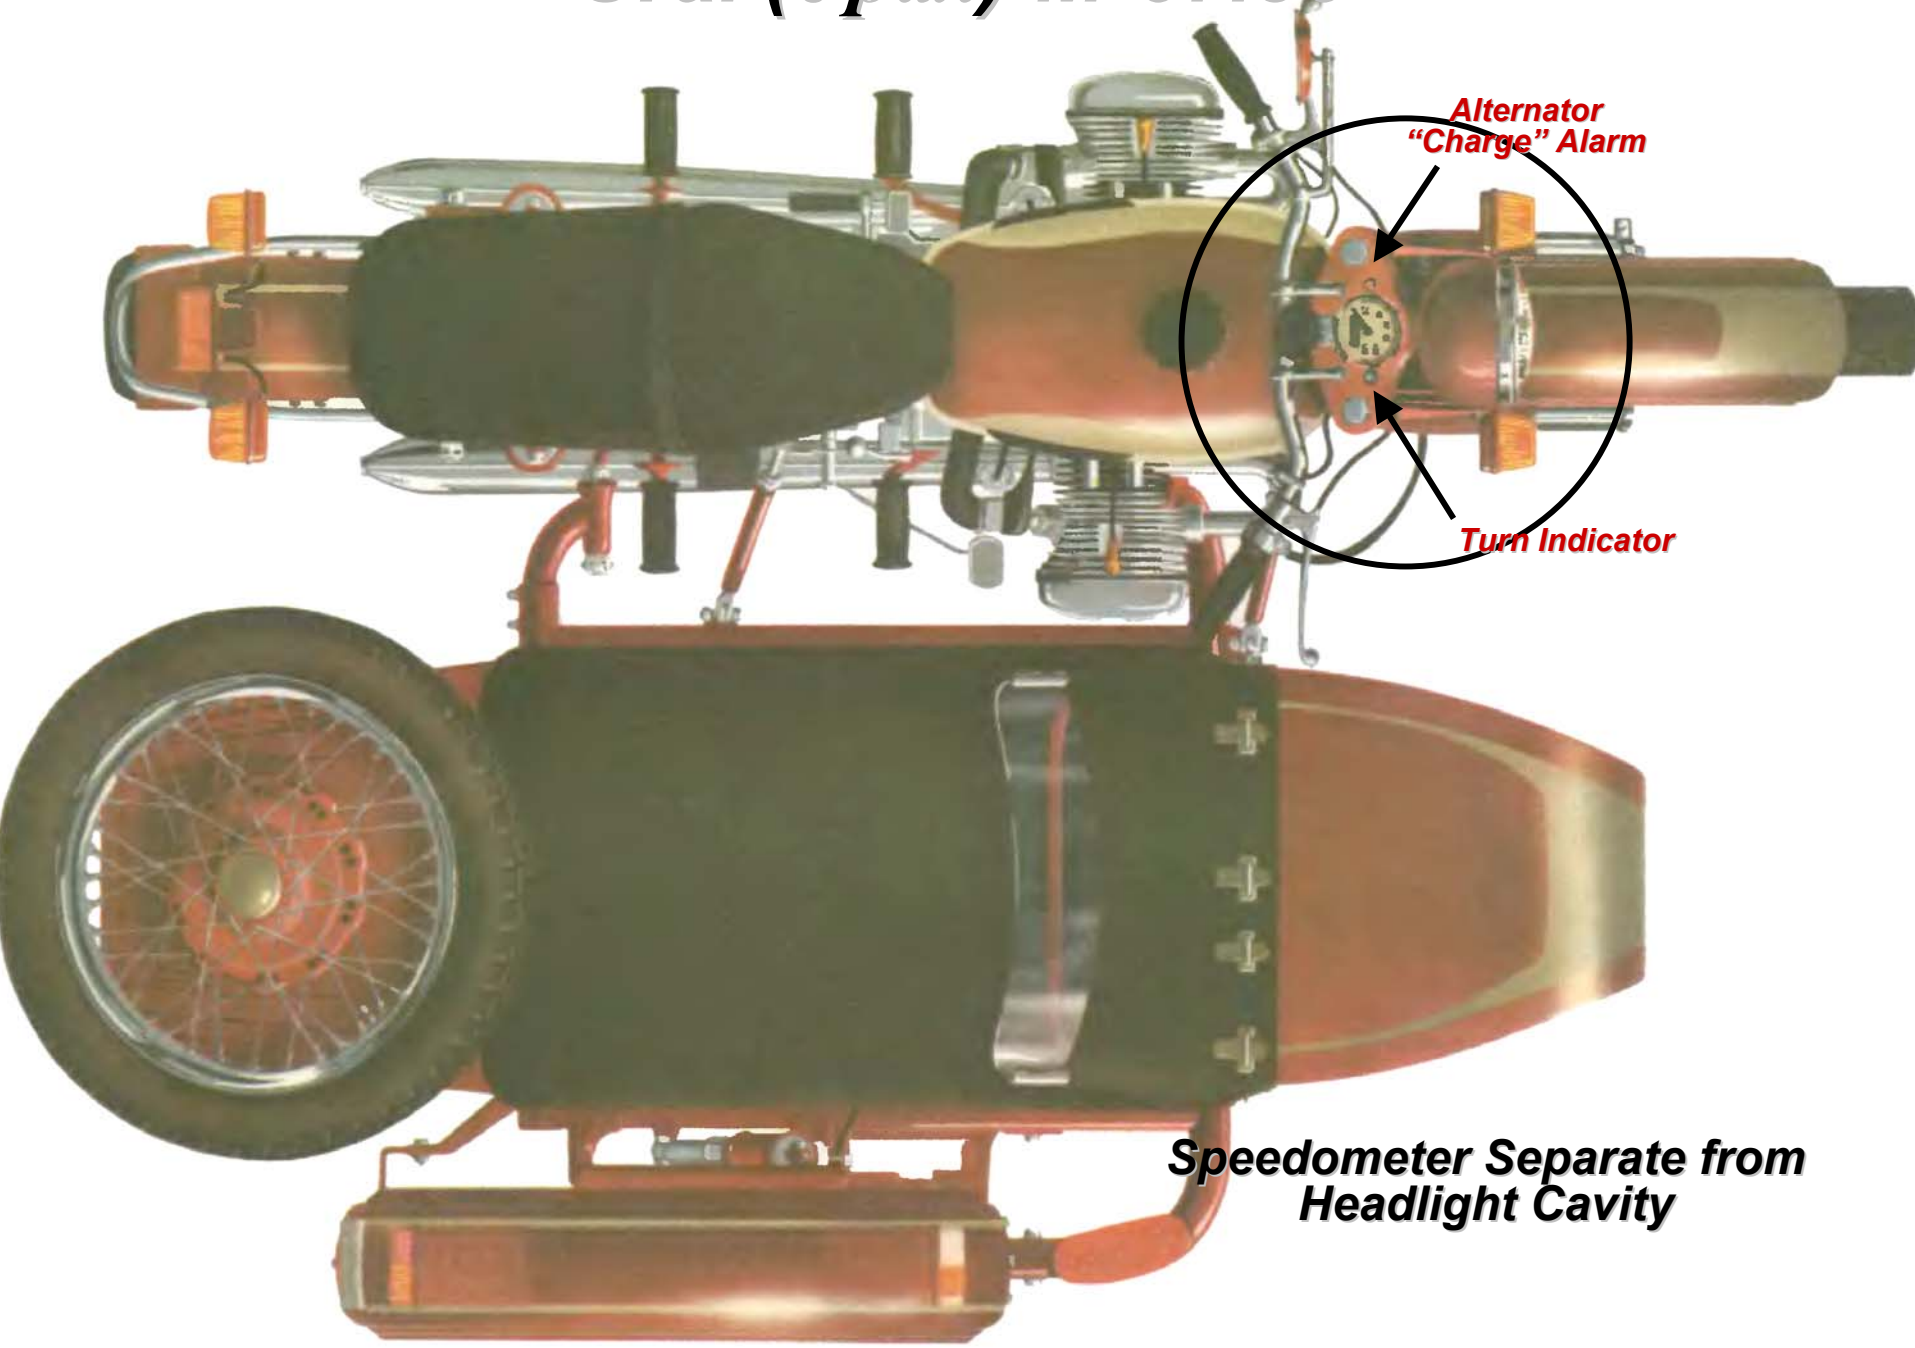

***Alternator
"Charge" Alarm***

Turn Indicator

***Speedometer Separate from
Headlight Cavity***

Ural (Урал) M-67.36 Headlight Assembly

***Alternator
"Charge" Alarm***

***Speedometer Separate from
Headlight Cavity***

Turn Signal



M-67 (Repair Manual)


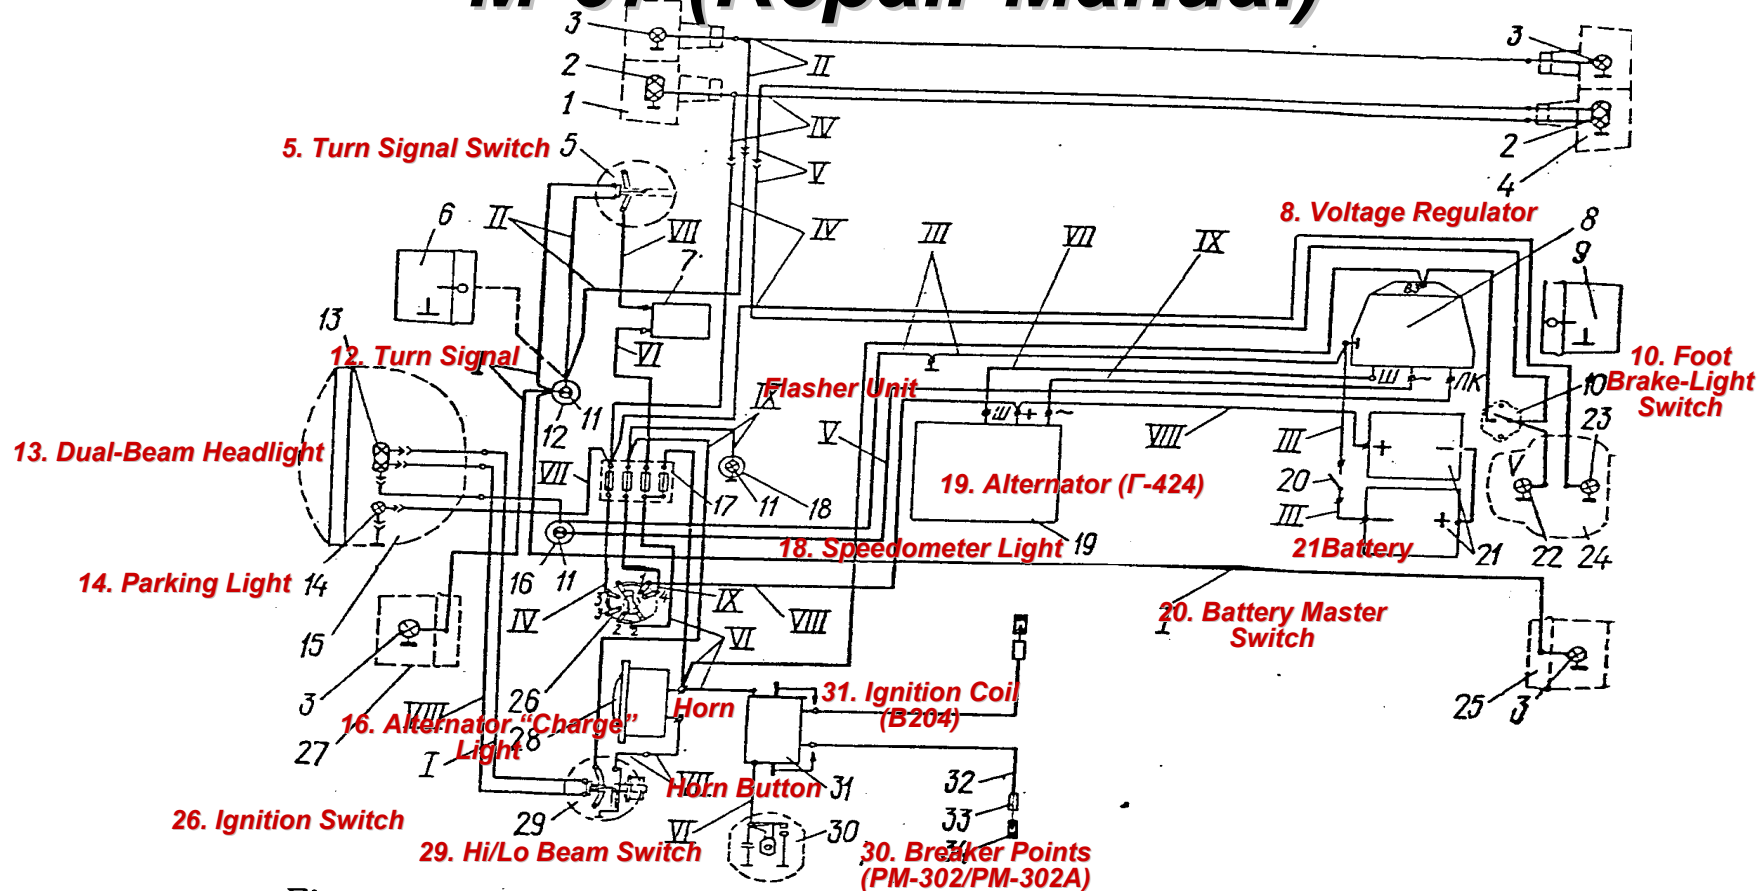


Fig. 44. Circuit Diagram of Electrical Equipment and Colouring of Wires:

1—side-car front lamp; 2—lamp bulb A12-21-6 of side light and stop light on the tail lamp of the side-car; 3—direction indicator lamp bulb A12-21; 4—side-car tail lamp; 5—direction indicator switch; 6—right-turn direction indicator lamp; 7—direction indicator breaker; 8—regulating relay; 9—right-turn rear direction indicator lamp; 10—stop light switch; 11—speedometer lighting and pilot lamp; 12—direction indicator performance pilot lamp; 13—far-reaching and bright light lamp bulb 12 V 45+40 W; 14—side lamp and parking lamp bulb 12 V 4 W; 15—headlamp; 16—generator performance pilot lamp; 17—safety fuse; 18—speedometer lighting lamp socket; 19—generator; 20—switch; 21—stop number plate lighting and side light lamp bulb A12-15; 22—motorcycle licence plate lighting; 23—motorcycle tail lamp; 24—motorcycle rear direction indicator lamp; 25—left-turn rear direction indicator lamp; 26—master switch; 27—left-turn front direction indicator lamp; 28—horn; 29—head lights turn-knob; 30—ignition distributor; 31—ignition coil; 32—high tension wire; 33—spark plug terminal; 34—spark plug


Colouring of wire insulation:
I—orange; II—violet; III—brown; IV—black; V—green; VI—red; VII—yellow;
VIII—blue; IX—grey

Ural (Урал) M-67 and M-67.36

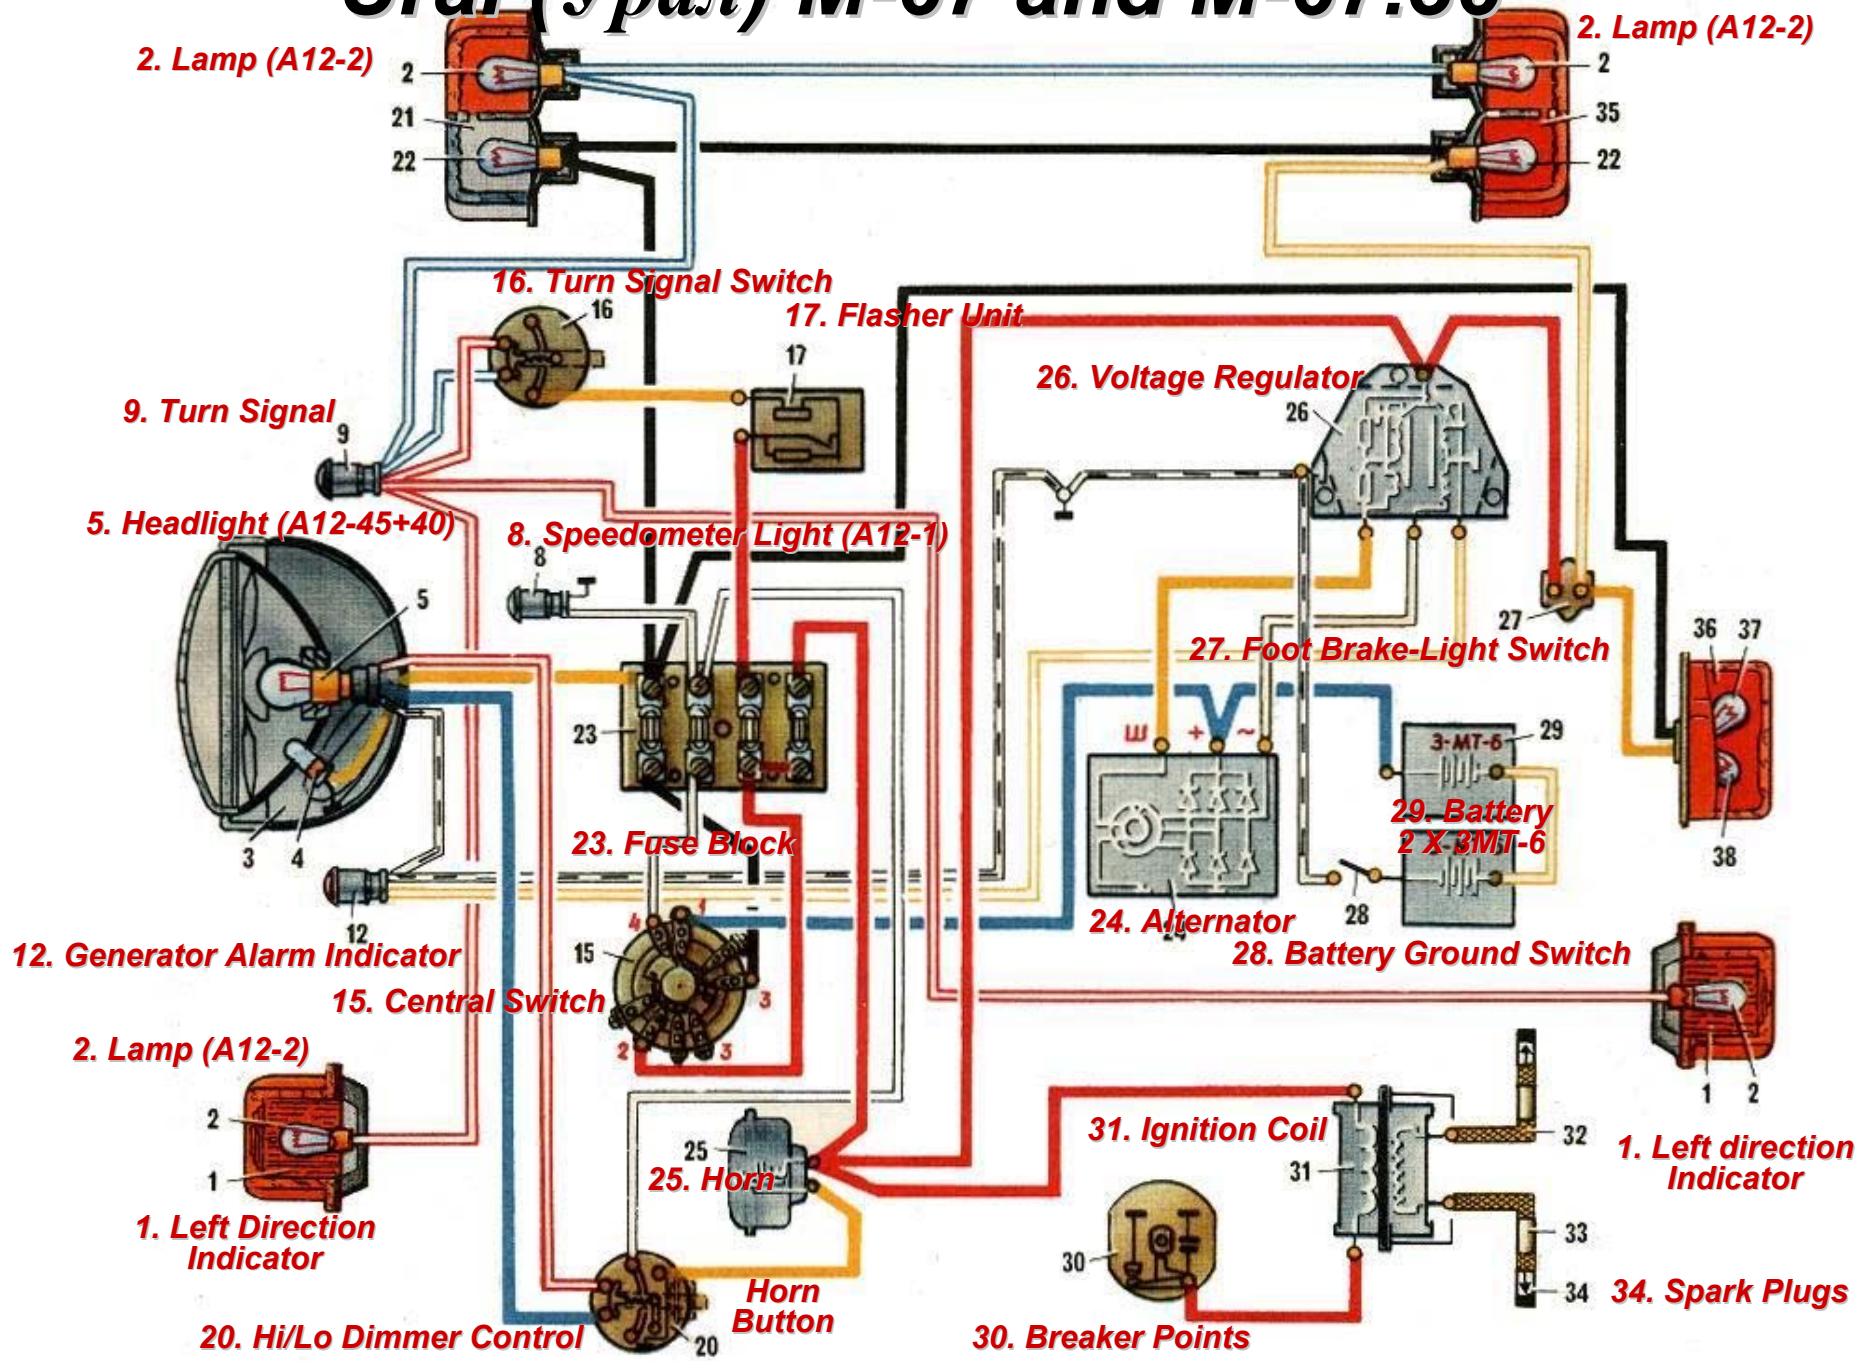


Ural (Урал) M-67 and M-67.36

Схема электрооборудования мотоциклов "УРАЛ" М67 и М67-36

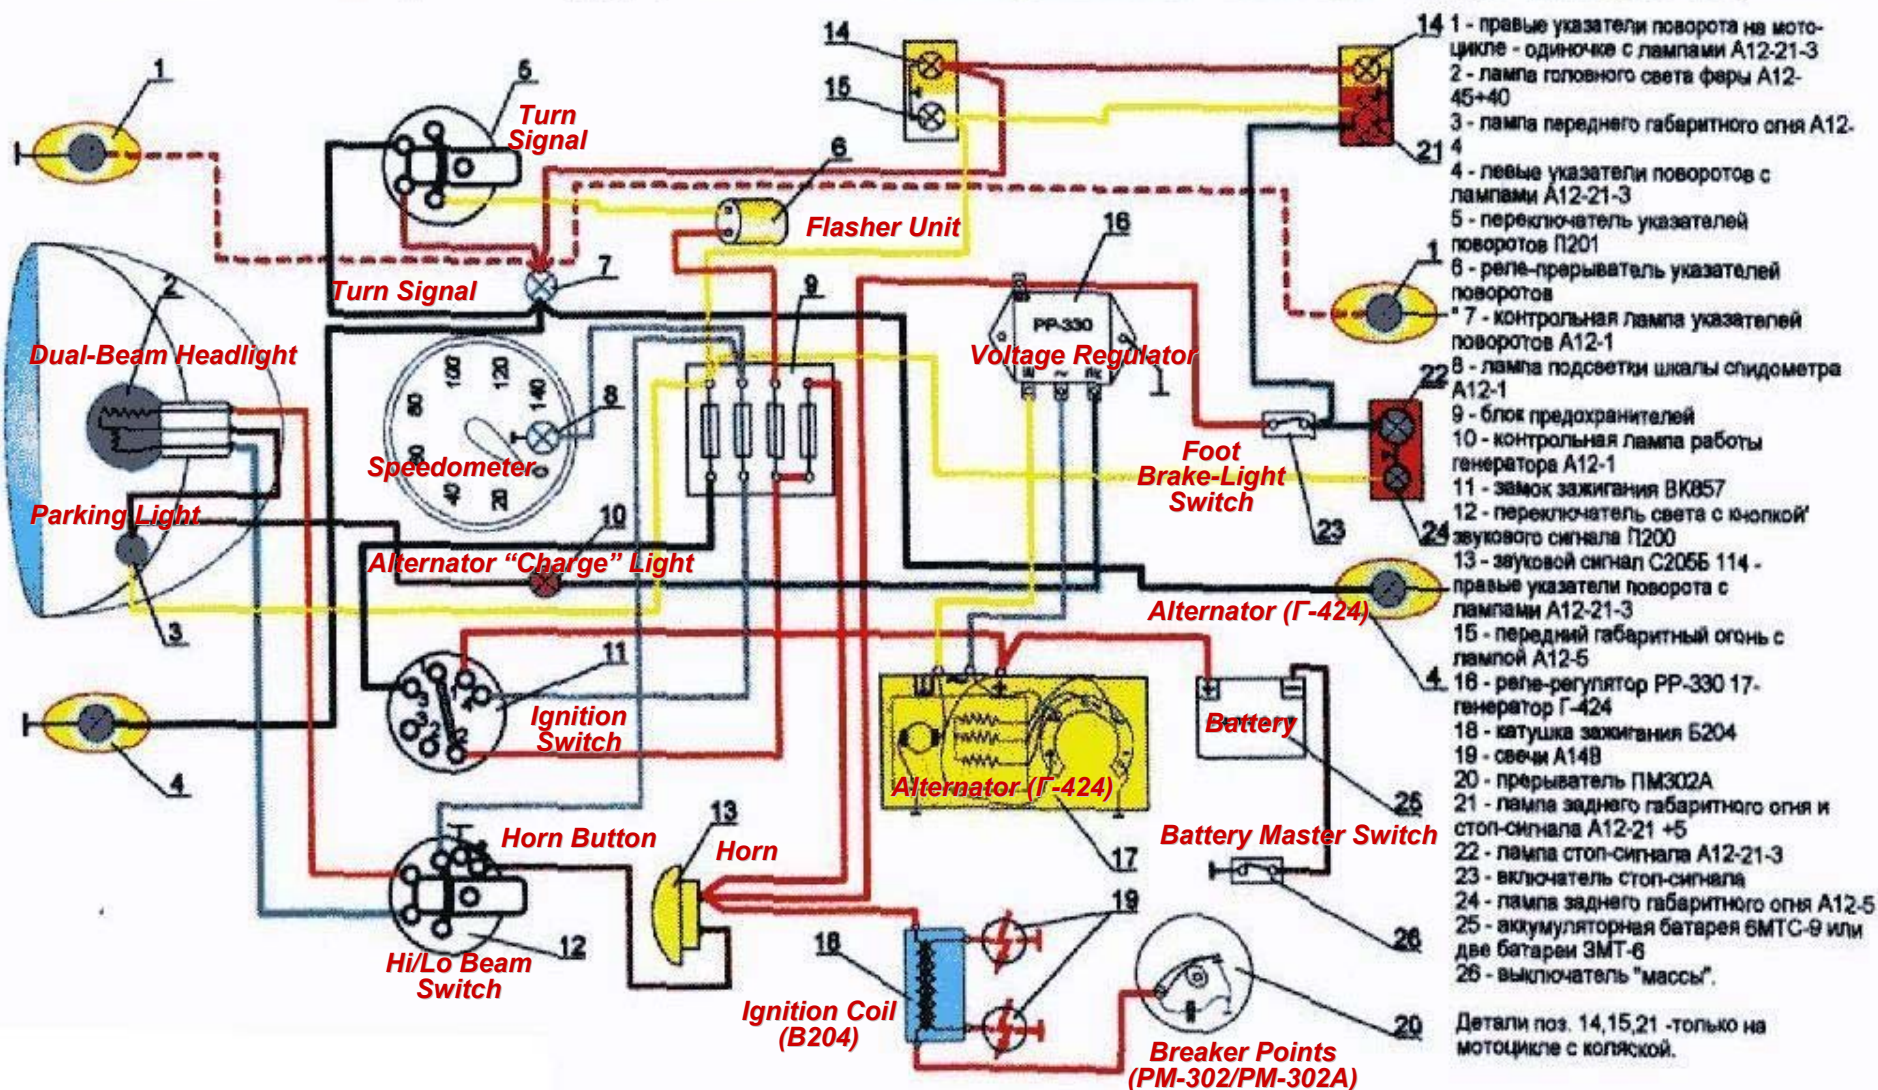

Ural (Урал) M-67 and M-67.36

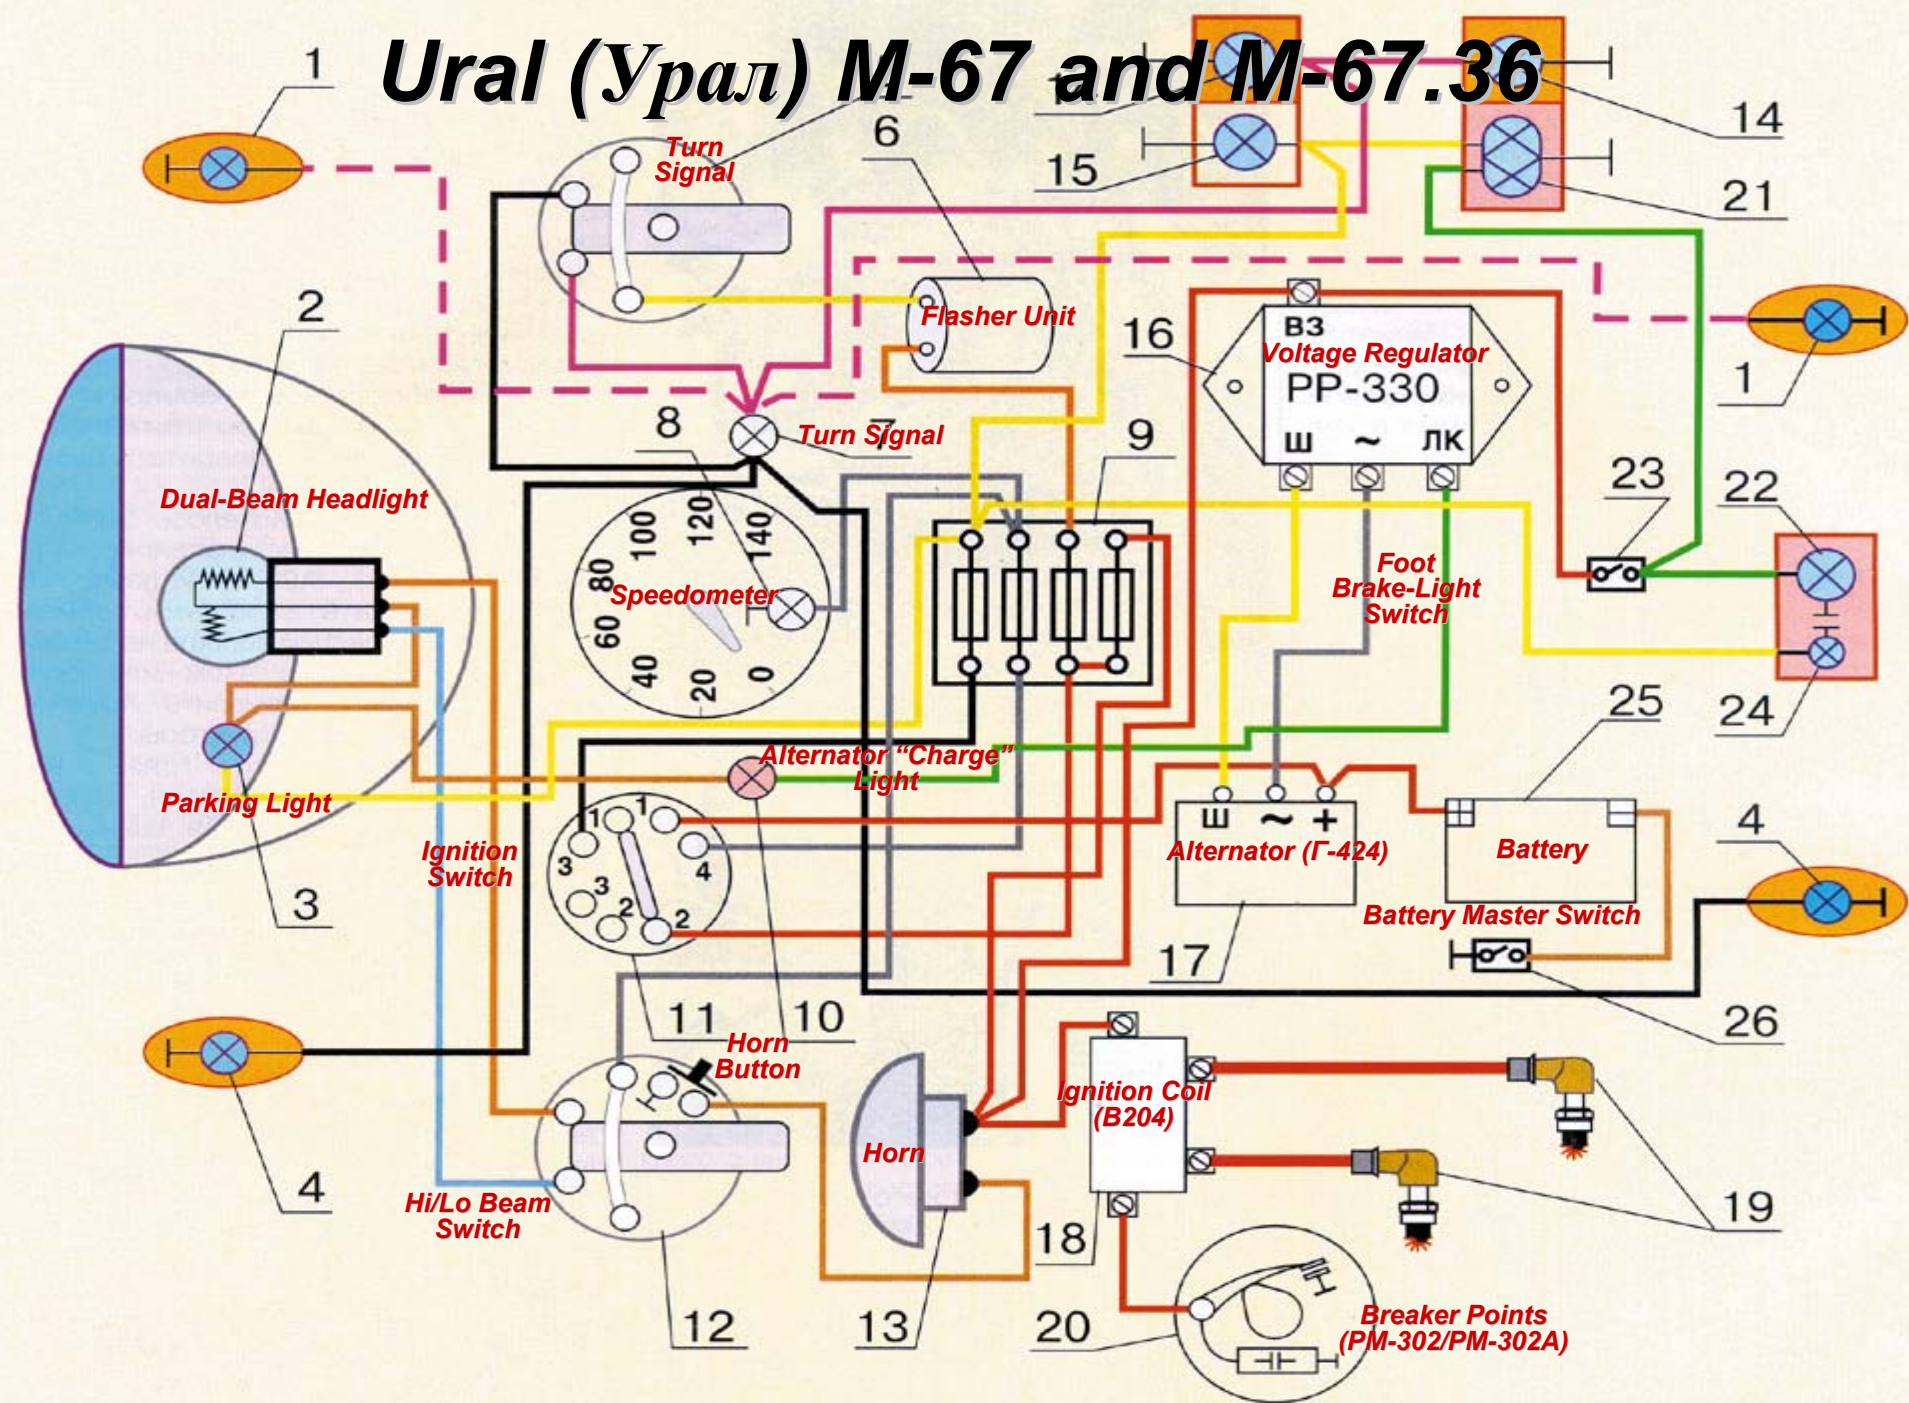


1974 M67-36

17 October 2006

Carl Allison

Absolutely no guaranty that wire colors are correct.

Ural (Урал) M-67.36

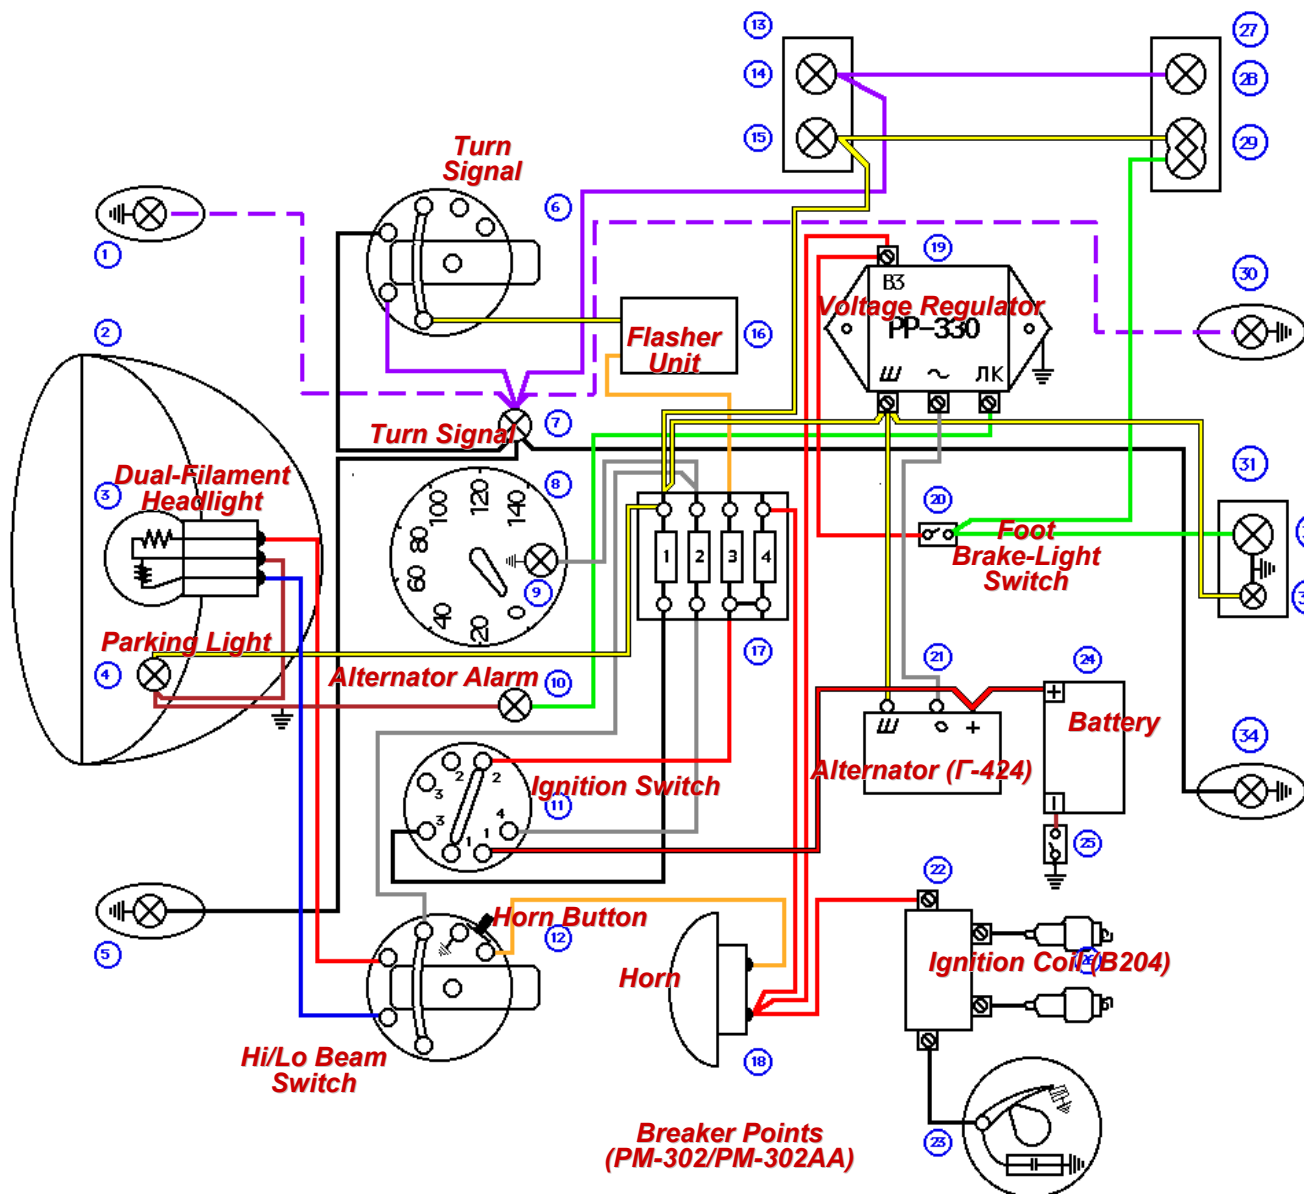

1. Right front turn indicator (sidecar not attached)
2. Headlight
3. Hi/Lo headlamp bulb
4. Parking lightbulb
5. Left front turn indicator
6. "Day/night" switch, Run/Stop switch
7. Highbeam ON indicator bulb of lamp
8. Speedometer
9. Speedometer light
10. Alternator warning light
11. Ignition switch
12. Light and turn indicator switch, horn button
13. Sidecar front light
14. Sidecar front side and parking light
15. Sidecar front running light
16. Flasher
17. Fuse block
18. Horn
19. Regulator
20. Rear brake light switch
21. Alternator
22. Ignition module
22. Spark plug
23. Points
24. Battery
25. Master Battery Switch*
26. Spark plugs
27. Sidecar rear light
28. Sidecar rear side and parking light
29. Sidecar brake and taillight
30. Rear right turn indicator (sidecar not attached)
31. Motorcycle rear light
32. Motorcycle brake light
33. Motorcycle tail light
34. Rear left turn indicator

* Deleted on electric start

IMZ-8.101-18004-10 ΦΓ-137
Headlight: A12-45+40

